

Features

- Operating voltage: 2.7V~5.2V
- LCD driving voltage: 3.0V~5.0V
- Applicable LCD duty from 1/8 to 1/16
- Suitable for various types of LCD panel
- Bias voltage adjustable from an external source

Applications

- Interface with HT163A
- Electronic dictionaries
- Portable computers
- Remote controllers
- Calculators


General Description


The HT1602L is a dot matrix LCD segment driver LSI implemented in CMOS technology. The chip contains 40-bit shift register (two 20-bit shift registers), 40-bit latch (two 20-bit latches), 40-bit level shifter, 40-bit 4-level driver and control circuits.

The HT1602L can convert serial data received from an LCD controller parallel data and then

send them out as LCD driving waveforms to the LCD panel. The chip is applicable up to 1/16 duty. Furthermore, the bias voltage which determines the LCD driving voltage can be optionally supplied from an external source, thus the chip is suitable for driving various LCD panel. These special features increase the versatility of the chip.

Block Diagram

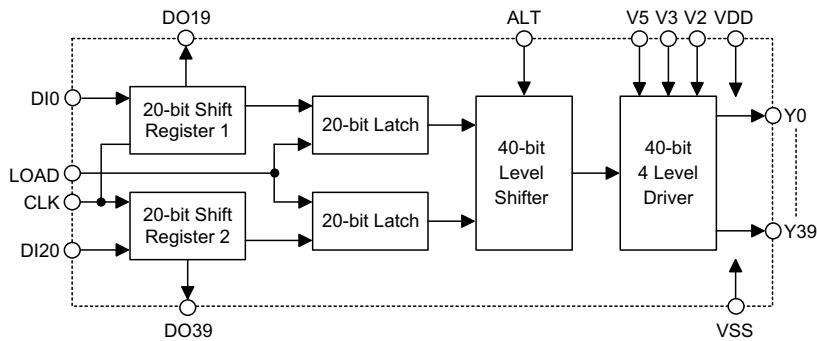

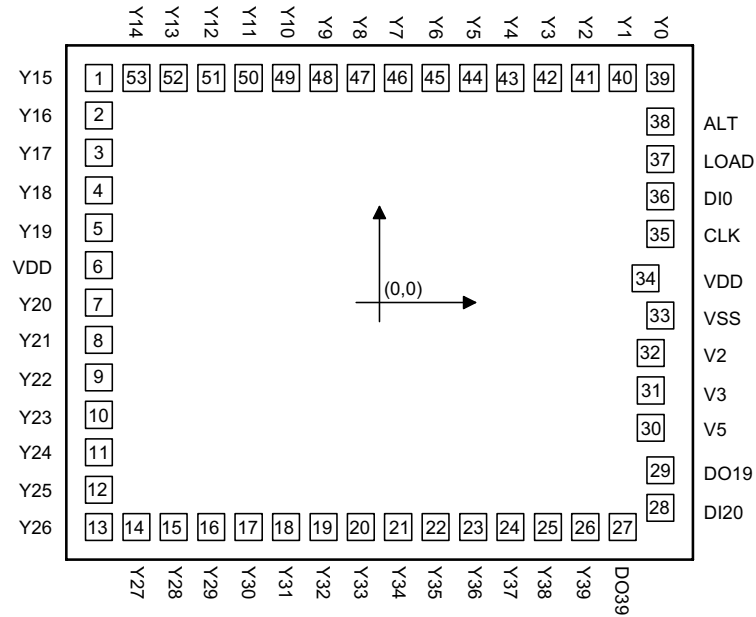Pad Assignment


Chip size: $87 \times 74 \text{ (mil)}^2$

* The IC substrate should be connected to VSS in the PCB layout artwork.

Pad Coordinates

 Unit: μm

Pad No.	X	Y	Pad No.	X	Y
1	-975.00	780.00	28	975.00	-713.00
2	-975.00	650.00	29	975.00	-583.00
3	-975.00	520.00	30	942.50	-435.50
4	-975.00	390.00	31	942.50	-305.50
5	-975.00	260.00	32	942.50	-175.50
6	-975.00	130.00	33	975.00	-45.50
7	-975.00	0.00	34	923.50	84.50
8	-975.00	-130.00	35	975.00	239.00
9	-975.00	-260.00	36	975.00	369.00
10	-975.00	-390.00	37	975.00	499.00
11	-975.00	-520.00	38	975.00	629.00
12	-975.00	-650.00	39	975.00	780.00
13	-975.00	-780.00	40	845.00	780.00
14	-845.00	-780.00	41	715.00	780.00
15	-715.00	-780.00	42	585.00	780.00
16	-585.00	-780.00	43	455.00	780.00
17	-455.00	-780.00	44	325.00	780.00

Pad No.	X	Y	Pad No.	X	Y
18	-325.00	-780.00	45	195.00	780.00
19	-195.00	-780.00	46	65.00	780.00
20	-65.00	-780.00	47	-65.00	780.00
21	65.00	-780.00	48	-195.00	780.00
22	195.00	-780.00	49	-325.00	780.00
23	325.00	-780.00	50	-455.00	780.00
24	455.00	-780.00	51	-585.00	780.00
25	585.00	-780.00	52	-715.00	780.00
26	715.00	-780.00	53	-845.00	780.00
27	845.00	-780.00			

Pad Description

Pad No.	Pad Name	I/O	Description
1~5	Y15~Y19	O	LCD driver output for segment*
6	VDD	—	Positive power supply
7~26	Y20~Y39	O	LCD driver output for segment
27	DO39	O	Shift register output pad for the 40th bit data
28	DI20	I	Data input pad of shift register 2
29	DO19	O	Shift register output pad for the 20th bit data
30, 31, 32	V5, V3, V2	I	LCD bias supply voltage
33	VSS	—	Negative power supply, ground
34	VDD	—	Positive power supply
35	CLK	I	Clock pulse input pad for the shift register
36	DI0	I	Data input pad of shift register 1
37	LOAD	I	Latching signal to latch shift register data
38	ALT	I	Alternate signal input pad for LCD driving waveform
39~53	Y0~Y14	O	LCD driver output for segment*

*: For Y0~Y39, one of VDD, V2, V3 or V5 is selected as a display driving source according to the combination of latched data level and ALT signal. Refer to the following table:

Latched Data	ALT	Display data output level
H	H	V5
	L	V _{DD}
L	H	V3
	L	V2

Absolute Maximum Ratings

Supply Voltage-0.3V to 6.0V Storage Temperature.....-50°C to 125°C
 Input Voltage $V_{SS}-0.3V$ to $V_{DD}+0.3V$ Operating Temperature-20°C to 70°C



Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

D.C. Characteristics
 $T_a=25^\circ\text{C}$

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
		V_{DD}	Conditions				
V_{DD}	Operating Voltage	—	—	2.7	—	5.2	V
I_{OP}	Operating Current	5V	No load	—	100	300	μA
I_{DD}	Standby Current	5V	—	—	1	5	μA
f_{LCD}	Clock Frequency	5V	—	3.3	—	—	MHz
t_{wCLK}	Clock Pulse Width	5V	—	125	—	—	ns
V_{IL}	"L" Input Voltage	5V	—	—	—	$0.3V_{DD}$	V
V_{IH}	"H" Input Voltage	5V	—	$0.7V_{DD}$	—	—	V
V_{LCD}	LCD Driving Voltage	5V	—	3.0	—	5.0	V


Timing Diagrams

1/16 duty and 1/5 bias

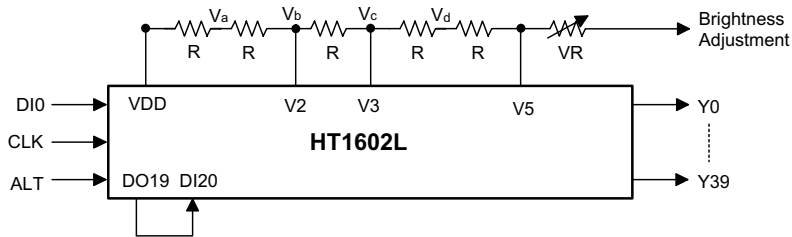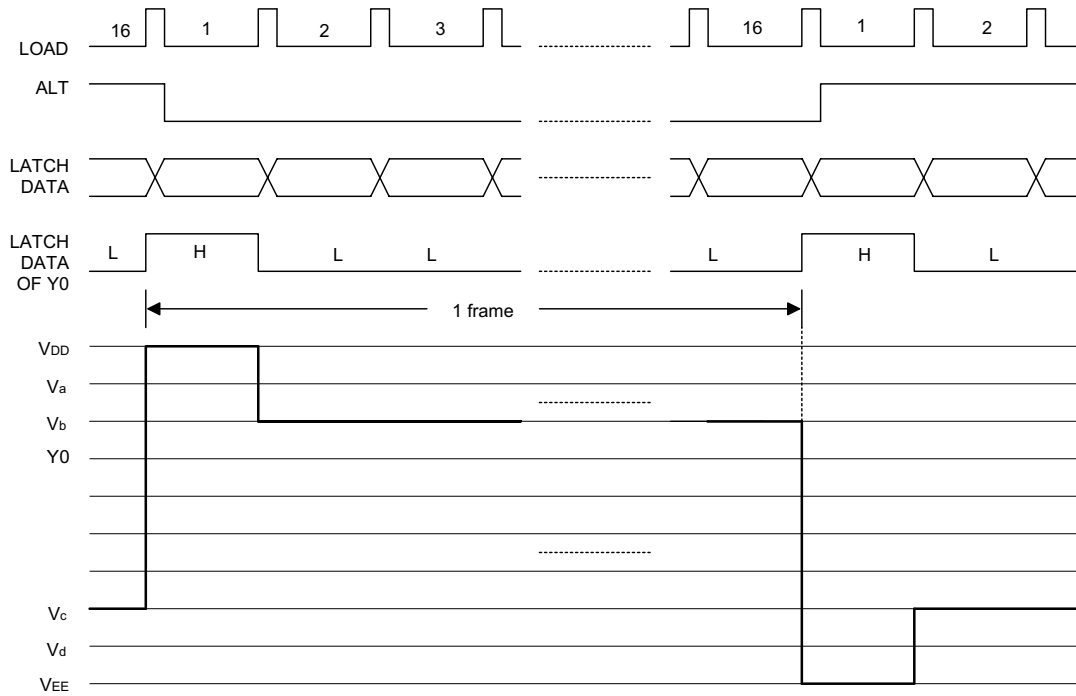

$$\begin{aligned}
 V_a &= V_{DD} - (1/5)V_{LCD} \\
 V_b &= V_{DD} - (2/5)V_{LCD} \\
 V_c &= V_{DD} - (3/5)V_{LCD} \\
 V_d &= V_{DD} - (4/5)V_{LCD} \\
 V_5 &= V_{DD} - V_{LCD} \\
 V_{LCD} &= V_{DD} - V_5; \text{ LCD driving voltage}
 \end{aligned}$$

Application Circuits

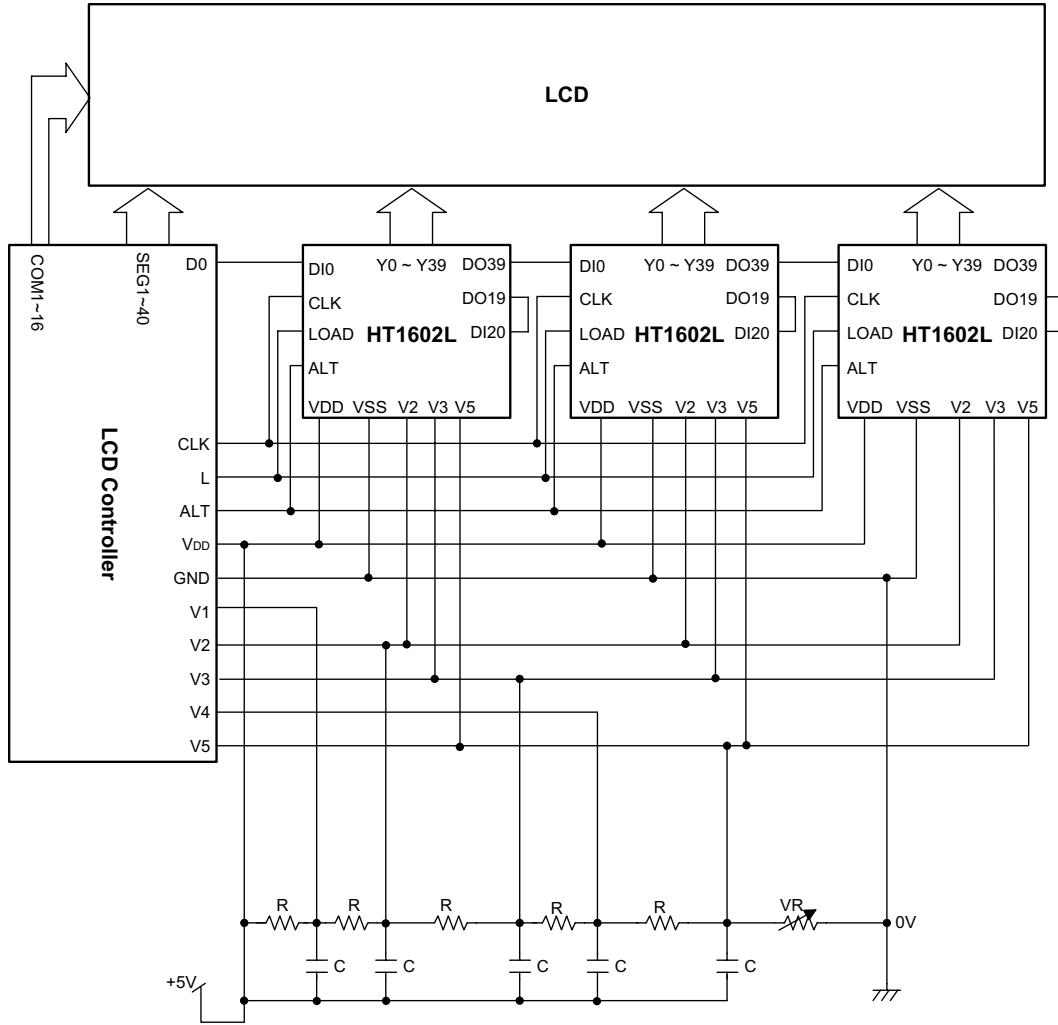

Holtek Semiconductor Inc. (Headquarters)

No.3, Creation Rd. II, Science-based Industrial Park, Hsinchu, Taiwan
Tel: 886-3-563-1999
Fax: 886-3-563-1189

Holtek Semiconductor Inc. (Sales Office)

11F, No.576, Sec.7 Chung Hsiao E. Rd., Taipei, Taiwan
Tel: 886-2-2782-9635
Fax: 886-2-2782-9636
Fax: 886-2-2782-7128 (International sales hotline)

Holtek Semiconductor (Shanghai) Inc.

7th Floor, Building 2, No.889, Yi Shan Rd., Shanghai, China
Tel: 021-6485-5560
Fax: 021-6485-0313

Holtek Semiconductor (Hong Kong) Ltd.

RM.711, Tower 2, Cheung Sha Wan Plaza, 833 Cheung Sha Wan Rd., Kowloon, Hong Kong
Tel: 852-2-745-8288
Fax: 852-2-742-8657

Holmate Semiconductor, Inc.

48531 Warm Springs Boulevard, Suite 413, Fremont, CA 94539
Tel: 510-252-9880
Fax: 510-252-9885

Copyright © 2000 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.