

Ordering Information

C123 - 26 TK


Series No. _____ Insulator Colour:
 No. of Pins: _____ K - Black
 10,14,16,20,26,30 G - Gray
 34,40,50,60,64
 Contact Plating: _____
 G - All Gold Plated
 T - Tinned
 C - Ni Plated Terminal
 & Gold Plated Dip Tail

C123 Series

Dip Plug, 2.54mm(0.100"), Strain Relief

Specifications:

Contact Resistance: 30mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0

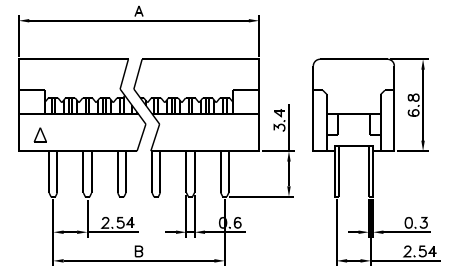

Positions	A	B
10	17.80	10.16
14	22.82	15.24
16	25.40	17.78
20	30.52	22.86
26	38.12	30.48
30	43.32	35.56

Positions	A	B
34	48.40	40.64
40	55.92	48.26
50	68.72	60.96
60	81.42	73.66
64	86.38	78.74

