

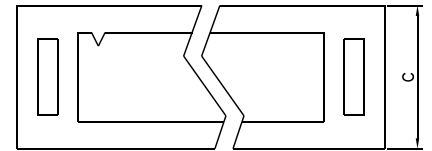


C124 Series

**Dip Plug, 2.54mm(0.100"),
Dual Row**

Specifications:

Contact Resistance: 30mΩ @ 100mA DC
 Insulator Resistance: 1000MΩmin. @ 500V DC
 Current Rating: 1AMP
 Voltage: 500V AC For 1 minute
 Operating Temperature: -55°C~+105°C
 Contact: Brass or Phosphor Bronze, Stamped
 Housing: PBT, UL94V-0

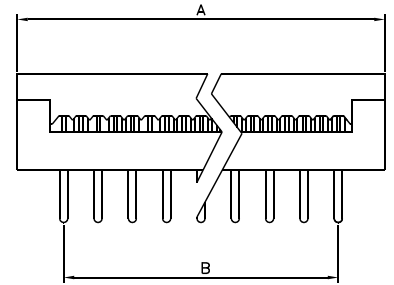

Ordering Information

C124 - 24 TK

Series No. ————
 No. of Pins: ————
 14,16,18,20,24,
 28,40
 Contact Plating: ————
 G - All Gold Plated
 T - Tinned
 C - Ni Plated Terminal
 & Gold Plated Dip Tail

Insulator Colour:
 K - Black
 G - Gray

Positions	A	B	C	D
14	22.74	15.24	10.60	7.62
16	25.12	17.78	10.60	7.62
18	26.74	20.32	10.60	7.62
20	29.74	22.86	10.60	7.62
24	35.00	27.94	18.18	15.24
28	40.10	33.02	18.18	15.24
40	55.20	48.26	18.18	15.24